




Centru de indoire pe lungime mare

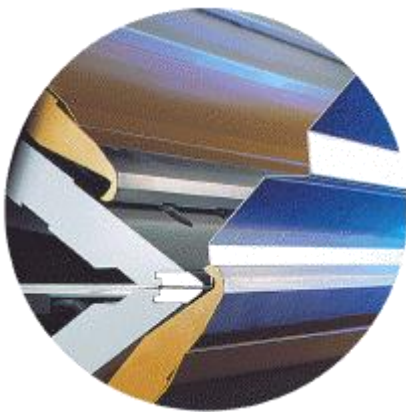

Indoire in sus

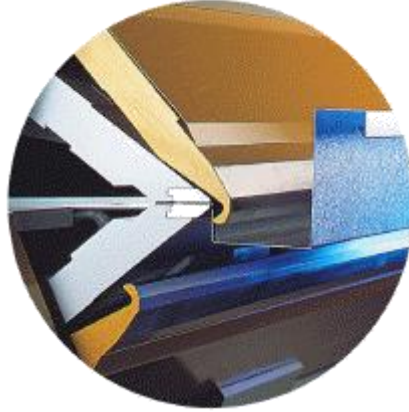

Indoire in jos

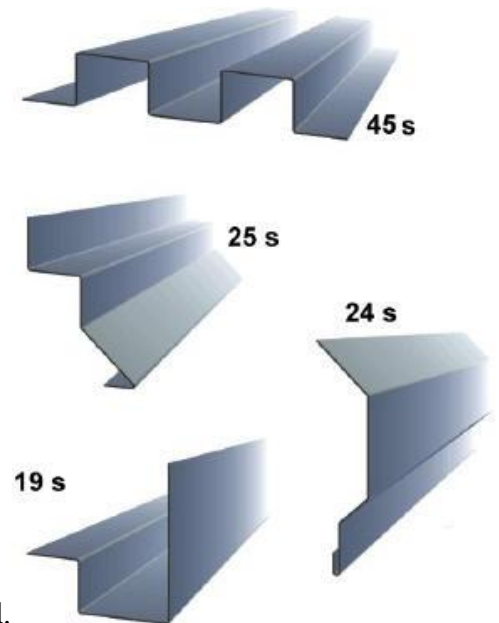

- Repere indoite in secunde, cu aceasi forma, exacte si fara grad.
- Fara intoarceri ale tablei, numai productivitate curata. Aceasta nu se realizeaza pe nici o masina de indoit pe lungime mare, de tip „conventionala”.
- Masina aduce un timp rapid de executie, inalta precizie, productivitate mare si costuri scazute.

Technische Daten	RAS 75.08	RAS 75.06	RAS 75.04
Biegelänge	8480 mm	6400 mm	4240 mm
Blechdicke max. (Stahlblech 400 N/mm ²)	1,5 mm	1,5 mm	1,5 mm
Blechdicke max. (Chromstahl 750 N/mm ²)	1,0 mm	1,0 mm	1,0 mm
Blechdicke max. (Aluminium 400 N/mm ²)	2,0 mm	2,0 mm	2,0 mm
Freibereich vor den Wangen bis zu	300°	300°	300°
Obere und untere Biegewange	126 °/s	126 °/s	126 °/s
Oberwange	60 mm/s	60 mm/s	60 mm /s
Hinteranschlag Greiferzangen	350 mm/s	350 mm/s	350 mm/s

